

TI



? WUZS` [US^>aSV
7` ZS` UW

BdiVgUrI SdS` fk

zF VbdBai M
I` SdS` fk

3` gS`6WdSVSf[a`
AHWd% 3



UALITY™
Continuous Quality Assurance

66HL4M-(V) 610-635 Watt

Mechanical Characteristics

5W^FkbW	@ ZkbW? a` aZUkefS^` W
@ažaXUM^e	#%\$/(° \$fi
6_ We[a` e	\$%\$ ° #%% ° % _ _
I WYZf	\$*Z] Y
8da` f9'See	%\$ _ f3` f[ZdW Wf[a` 5aSf[YI : [YZ FdS` e_ [ee[a` f>ai ;da` f FW bWdW 9'See
8dS_ W	3` aV] W 3'g_ [g_ 3^ak
<g` Uf[a` 4aj	:B(* DSfW
BdfWf[a` 5'See	5'See ::
;75 8[dWFkbW	5'See 5
5a` ` WfadFkbW	<=" ? ! ? 5& A fZ W
A gfbgf 5ST W	&Z' _ _ \$ /fj &" _ _ /Zj \$" _ _ ad5gefa_ [W >W YfZ

Packaging Configuration

BS^W 6_ We[a` e	\$%+ (° ###" ° #'\$ # _ _
BSU] [Y VWS[^ /Fi a bS^We/A` WeSU] fi	%# bUe! bS^We (\$ bUe! efSU] f (\$" bUe! &" i: C 5a` fS[W


Specifications (STC)

? Sj L g_ Bai Wd B_ Sj M bO	(#" (#' (\$" (\$' (%' (%)
? Sj L g_ Bai Wd Ha fSYW H_b MIO	&" Z (&" Z) % &" Z_& " &#Z") &#Z% &#Z%
? Sj L g_ Bai Wd 5gdWf _ b MIO	#" Z' & #' Z# " #' Z#(#' Z\$ #' Z* #' Z&
A bW ZU[dUg[f Ha fSYW Ha U MIO	&" Z% &" Z + &" Z_& " &Z# &+Z) &+Z%
EZadZU[dUg[f 5gdWf :eU MIO	#(Z# #(Z* #(Z# #(Z\$ #(Z+ #(Z%
? aVg W7 U[W UK EF5 M O	\$\$Z * \$\$Z) \$\$Z_& \$\$Z# & \$\$Z\$ \$%Z #
Bai Wd Fa Wd UV	" p L %
FW bWdSfgdW5aW U[W fe aXB_ Sj	Z Z+ , !, 5
FW bWdSfgdW5aW U[W fe aXHa U	Z Z_& , !, 5
FW bWdSfgdW5aW U[W fe aX:eU	Z Z_& , !, 5
EF5, ;dSV[S` UW#"" ! _ ! 5W^FW bWdSfgdW , 5! 3? #Z	

Application Conditions

A bWdSf[Y FW bWdSfgdW	Z" , 5 p L) ", 5
? Sj L g_ EkefW_ Ha fSYW	#" " ! #" " H65 / 75fi
? Sj L g_ EW[W 8geWDSf[Y	%' 3

Engineering Drawings

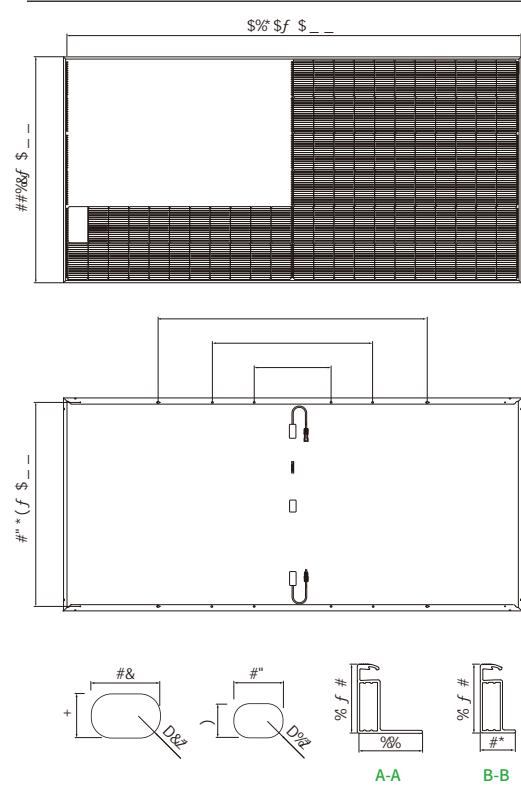

Electrical Performance

Power-Voltage Curves (66HL4M- V 615W)

Power (W)

Voltage (V)

Current-Voltage Curves (66HL4M-(V) 615W)

Current (A)

Voltage (V)